

# Tiandy



## TC-R3840 Spec: I/B/N

# H.265 8HDD 40ch NVR



## KEY FEATURES

### HD Input

- S+265/H.265/H.264 video formats
- Connectable to the third-party network cameras
- Up to 40 IP cameras can be connected
- Supports live view, storage, and playback of the connected camera at up to 12MP resolution

### HD Output

- HDMI and VGA independent outputs
- HDMI Video output at up to 4K (3840 × 2160) resolution

### HD Storage

- 8 SATA interfaces connectable for recording and backup, up to 10TB for each HDD
- S+265 compression effectively reduces the storage space and costs by up to 75%

### HD Transmission

- 2 self-adaptive 10/100/1000 Mbps network interfaces

### Various Applications

- Centralized management of IP cameras, including configuration, information import/export, real-time information display, two-way audio, upgrade, etc.
- Connectable to smart IP cameras from Tiandy and the recording, playing back, and backing up of VCA alarms can be realized
- VCA detection alarm is supported
- Smart search for the selected area in the video and smart playback to improve the playback efficiency
- Web6 supports plug-in-free browsing and can preview videos on all browsers



## SPECIFICATIONS


Input	
Video Input	40-ch
Max Resolution	12MP
Two-way Audio Input	1-ch, 3.5mm
Bandwidth	Income 320Mbps; Outgoing 320Mbps
Output	
HDMI/VGA Output	HDMI 2-ch, 3840×2160, 2560×1600, 2560×1440, 1920×1080, 1440×900, 1366×768, 1280×800, 1280×720, 1024×768, 800×600
	VGA 2-ch, 1920×1080, 1440×900, 1366×768, 1280×800, 1280×720, 1024×768, 800×600
Screen Split	1/3/4/6/8/9/10/13/16/20A/20B/25/32/36/40/64
Audio Output	1×3.5mm, 1×BNC
Decoding	
Decoding Format	S+265/H.265/H.264
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Preview Capability	2×12MP, 4×8MP, 4×6MP, 5×5MP, 8×4MP, 9×3MP, 16×1080P, 32×720P, 40×4CIF
Synchronous Playback	2×12MP, 4×8MP, 4×6MP, 5×5MP, 8×4MP, 9×3MP, 16×1080P, 16×720P
Records Encryption	Yes
Hard Disk	
SATA	8 SATA interfaces for 8 HDDs
Capacity	Up to 10TB for each HDD
eSATA Interface	1 eSATA interface
Array Type	JBOD, RAID0/1/5/6/10
External Interface	
Network Interface	2×RJ45 self-adaptive 10/100/1000 Mbps network interfaces
USB Interface	2×USB 2.0, 1×USB 3.0
Serial Interface	2×RS-485, 1×RS-232
Alarm In/Out	16/4
Network	
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, QoS, IPV4, IPV6, Multicast, ARP, UDP, SNMP, SSL, Telnet, RTMP, NFS
System Compatibility	ONVIF (PROFILE S/T), SDK, P2P
General	
Web Version	WEB6
Language	Simple Chinese, Traditional Chinese, English, Spanish, Korean, Italian, Turkish, Russian, Thai, French, Polish, Dutch, Hebraism, Arabic (only for UI), Vietnamese (only for IE)
Operating Conditions	-10°C ~ 55°C, 10%~90% RH
Power Supply	AC100~240V, 50/60HZ
Redundant Power	N/A
Consumption (without HDD)	≤80W (without HDD)
Chassis	2U
Dimensions	94×440×460mm, (3.7×17.32×18.11 inch)
Weight (without HDD)	7.2Kg (15.87lb)

### AVAILABLE MODEL


**TC-R3840 SPEC: I/B/N**

# Tiandy

## DIMENSIONS (Unit: mm)

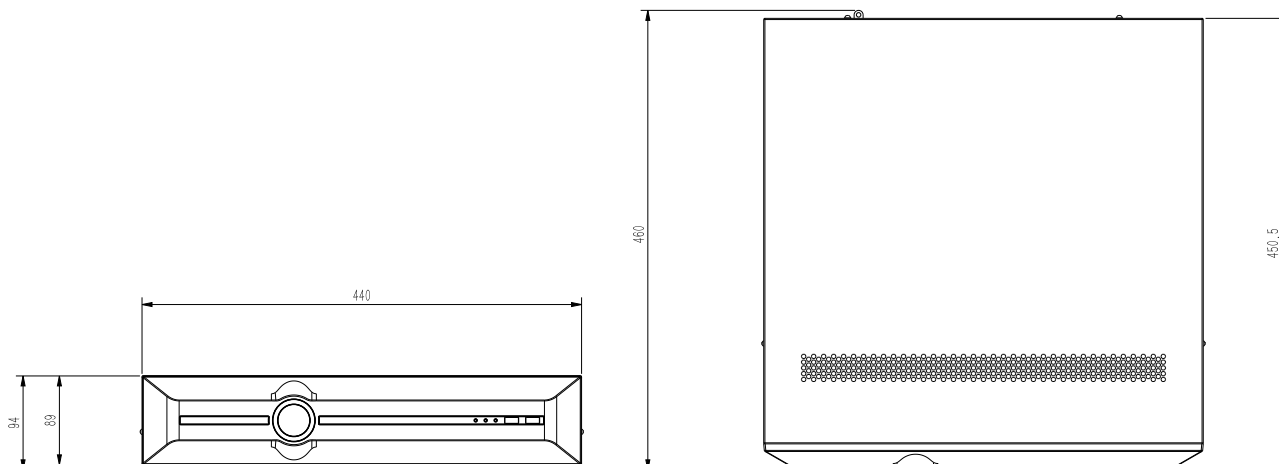

## Physical Interfaces

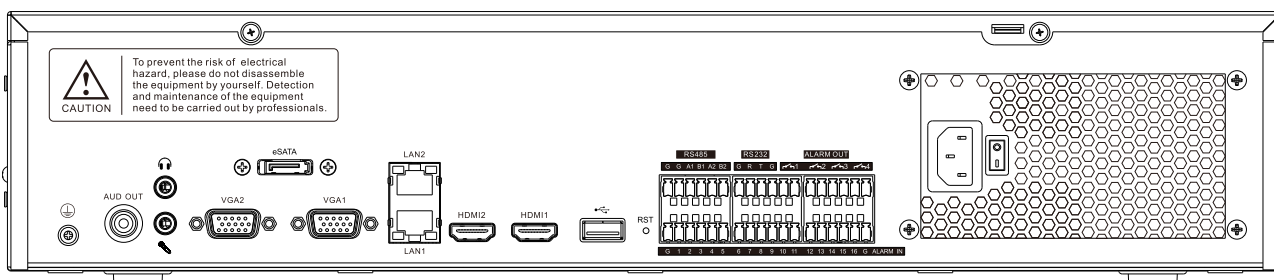

DISTRIBUTED BY



**Tiandy Technologies Co.,Ltd.**

Email: [sales@tiandy.com](mailto:sales@tiandy.com)

Tel: +86-22-58596065

Website: [en.tiandy.com](http://en.tiandy.com)

Fax: +86-22-58596048